


## ASSEMBLY INSTRUCTIONS


- Please read carefully before start the assembly.
- A minimum 4 people required for assembly due to the legs needing to be aligned exactly with the top. Three people to hold the top, while the forth positions the legs accordingly. Also probably need to mention that utmost care is needed when placing the top onto the legs so that chipping doesn't occur.
- To prevent damage to your floor or carpet, please check the bottom of each piece of furniture for stain residue and rough surfaces and check for staples or nails left after removing the packaging material.  
The manufacturer will not be held responsible if preventative steps are not taken prior to installation.
- Unpack and dispose of all packing material but be careful not to throw away any assembly parts or hardware.  
Read the instruction sheet and parts list carefully. Remove all staples and screws used for packaging carefully using pliers and (or) screwdrivers to prevent injury and scratching or damaging flooring.

**PARTS INCLUDED:**

A. BASE [x1]

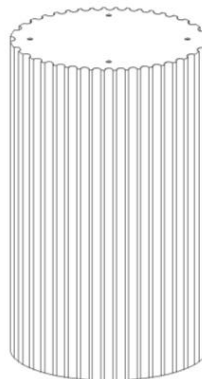


B. TABLETOP [x1]

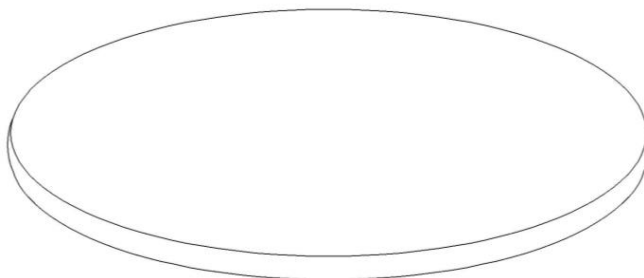**HARDWARE :**


C. ALLEN KEY BOLT M6 [x8 + 2 Extra]



D. ALLEN KEY M6 [x1]



E. METAL BRIDGE PLATE [x1]

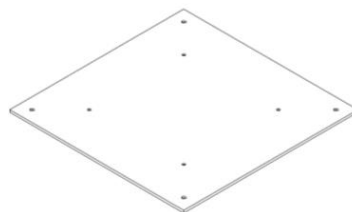

## STEP 1 :

Open the base carefully and place at the desired area. Adjustable levelers are attached at bottom side. Adjust them to level the base, in case of uneven floor.

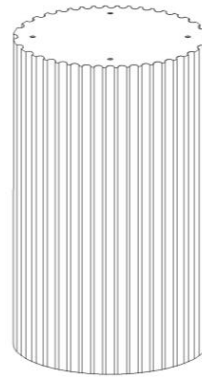


IMAGE 1 - BASE PLACEMENT

## STEP 2 :

Unpack the tabletop. There is a metal bridge plate attached underneath the top with Allen key bolts. Remove the bridge plate using Allen Key driver. **Secure these Allen Key bolts. These will require again to attach bridge plate with tabletop.**

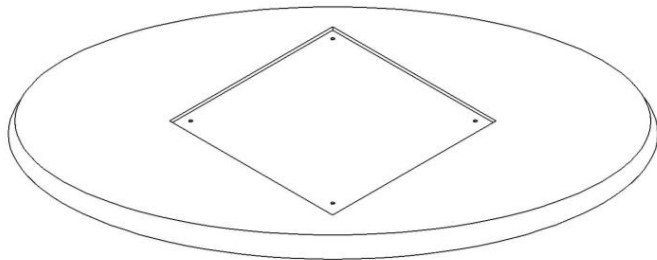


IMAGE 2 - UNPACK TOP WITH BRIDGE PLATE

## STEP 3 :

Attach the metal bridge plate with the base using Allen Key bolts and driver which is part of the hardware kit.

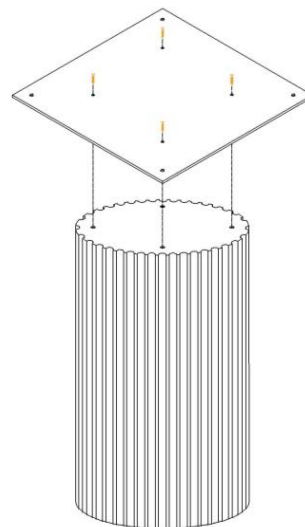


IMAGE 3 - Metal bridge plate assembly with base

## STEP 4 :

Put the tabletop on the base. Metal bridge plate will place in the top's underneath cavity part. 4 persons are recommended for top placement.

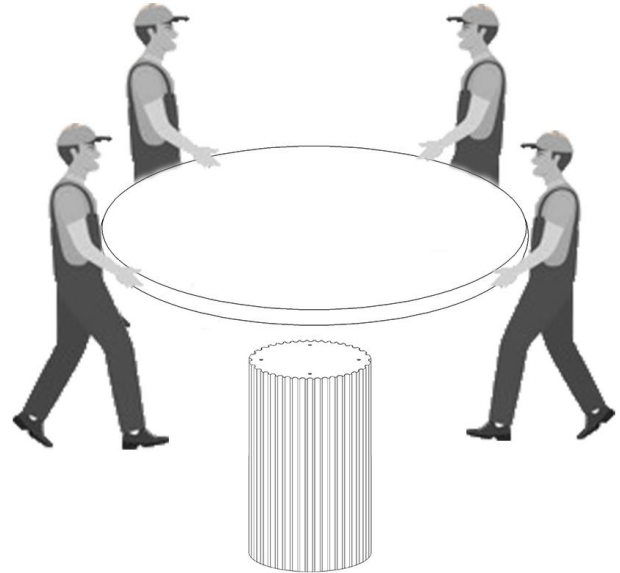


IMAGE 4- ATTACHMENT OF TABLETOP WITH BASE

## STEP 5 :

Attach the bridge plate with the tabletop using Allen Key Bolts and driver. **Use the same Allen Key bolts those were used to remove the metal bridge plate from top.** Ensure all bolts are completely tightened.

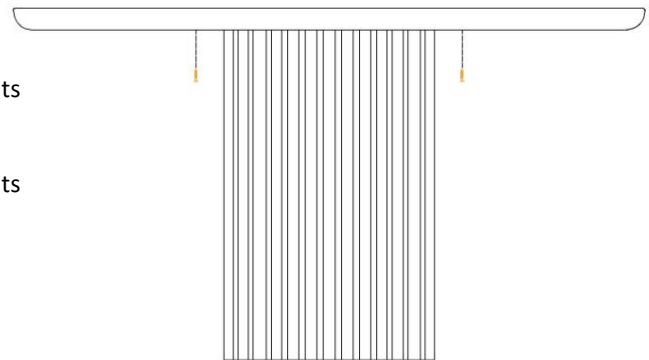


IMAGE 5- Fixing of bolts

## STEP 6 :

Your table is ready to use.

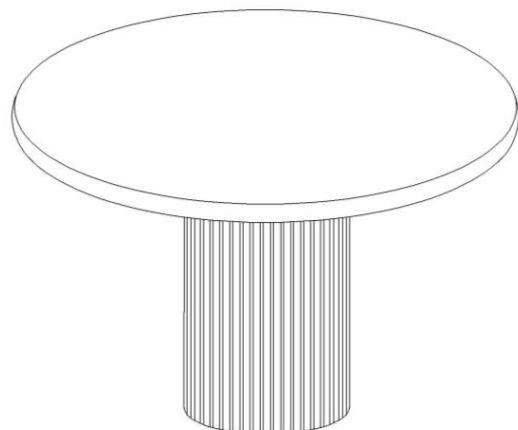


IMAGE 6- ASSEMBLED UNIT

## CARE & MAINTANCE INSTRUCTIONS

- Use a clean soft cotton cloth to wipe the surface. Do not use abrasive or chemical cleaners.
- Wipe the surface immediately if any liquid product spills on the top.
- During normal use every day, screws, bolts, nuts, and wooden plugs may loosen up. They should be periodically inspected and re-tightened to prevent damage to the furniture and (or) personal property or cause injury. Always check to be sure all hardware on this list and the above-mentioned components is attached to the furniture properly and kept always tightened.
- In case of relocation, dismantle the product first and follow the assembly instructions for re-assembly.